

BLACK WALL

Bass Overdrive - Preamp - 3 Band EQ

OPERATION

- 1 - Connect the input jack to your instrument
- 2 - Connect the output jack to your pedal chain or directly to amplifier

Overdrive Side:

DRIVE: Linear gain control up to high gain OD

TONE: Passive tone filter

BASS C.: Low frequency enhancer (-6dB to +6dB)

VOL OD: Master volume

Preamp EQ Side:

BASS: 80Hz cut/boost (-12dB / 0 / +12dB)

MID: 550Hz cut/boost (-12dB / 0 / +12dB)

TREBLE: 5.5kHz cut/boost (-14dB / 0 / +14dB)

VOL PRE: Master volume

Rear Panel Connections:

INPUT: Jack(Mono)

OUTPUT: Jack(Mono)

DC Adaptor (center negative)

OUTPUT Balanced: XLR connector

- The pedal is a preamp with B,M e T pots in flat position. EQ go on when you turn pots to cut or boost the frequencies.
- Drive and Tone are linked in Overdrive circuit. You can exclude OD by turning down DRIVE pot. BASS CONT is a parallel circuit with low frequencies filter.
- Vu-Meter displays the input signal level. Input signal up to 1V RMS is acceptable(white light). Red Light = clipping



Specifications:

Power Supply: 9v DC

Current Flow: 20mA


Switch: Buffer bypass

Enclosure: Stainless steel 304

Weight: 750gr

Wood Sides: Okoumè black

Size: 170x110x42mm

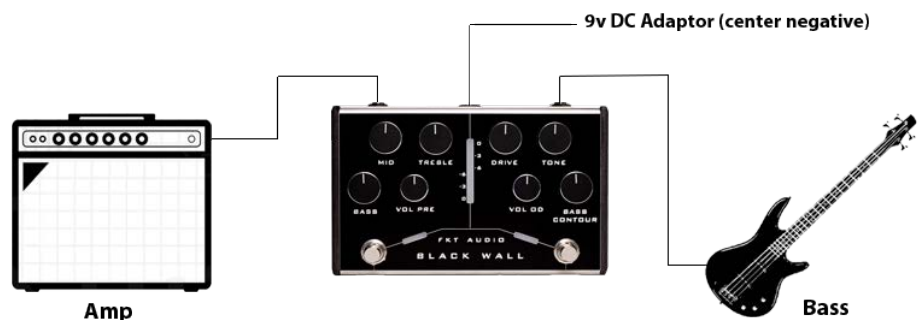

IMPORTANT: Use only power supplies for musical instruments (e.g. One Spot or superior).

FKT Audio decline any responsibility for the use of unstabilized or unsuitable power supplies.



FKT AUDIO®

Warranty

FKT Audio warrants the product to be free from defects in material and workmanship for a period of 3 years from the original date of purchase. if the product fails within the warranty period, FKT Audio will repair or, at our discretion, replace the product at no cost to the original purchaser.

Exclusions

This warranty covers defects in manufacturing discovered while using this product as recommended by FKT Audio.

This warranty does not cover loss or theft, nor does the coverage extend to damage caused by misuse, abuse, unauthorized modification, improper storage, lightning, or natural disasters.

Limits of Liability

In the case of malfunction, the product will be repaired or replaced, as described above. FKT Audio will not be liable to any party for damages arising from the failure of this product.

The following damages are not included: damage to other equipment and damages incidental to or arising from the inability to use this product.

